

# LUGNA

FORM & FUNCTION



## ASSEMBLY INSTRUCTIONS

### Hat Shelf and Hangrail

*LUGNA understands the importance of timeless style and practical durability for a home's form and function. Our European-inspired collection is simple and easy to use, with five modern colours that complement any style and space. LUGNA's modular system allows for endless configurations and additions, with various-sized cabinets, drawers, shelving, and hinged doors that can be combined to create a bespoke look on any budget. Whether you're looking for something modern and sleek or classic and elegant, LUGNA has something for everyone.*



SCAN for  
more info

10 YEAR  
WARRANTY




## What you will need

Tape Measure, Builders Square, Multi Function saw, Planner, Circular Saw, Sawhorses, Battery Driver, Battery Drill, Drills, Hammer, Chisel, Spirit Level, Caulking gun, Gap Filler.

### STEP 4

#### Measure and cut the hat shelf to size


Measure the full length of the back wall. Using your builders square, check corners for square. Mark the hat shelf and cut it to size.

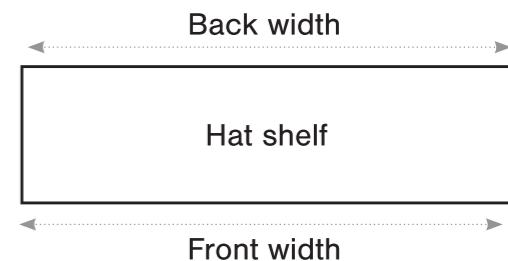

### STEP 1

#### Measure wall batten position


Measure the width of the back wall as shown on the diagram. Mark the measurement on the wall batten provided and cut to size.

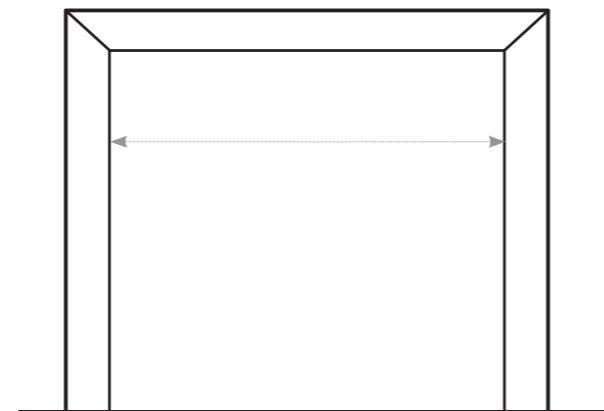

### STEP 5

#### Place hat shelf




Place the hat shelf on top of the back batten and side cleats. Once you are happy with fit, you can fix it in place. Use your screw fixings to secure the hat shelf to the wall battens.

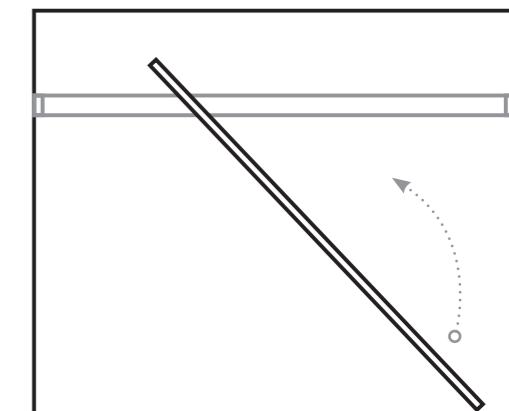

### STEP 2

#### Mark the position of battens

Use a spirit level and mark a pencil line on the back wall. Continue around both sides towards the front of the wardrobe, approximately 450mm.

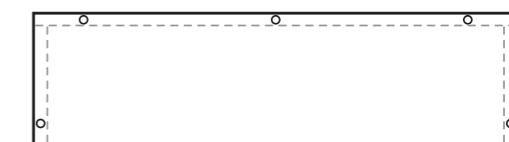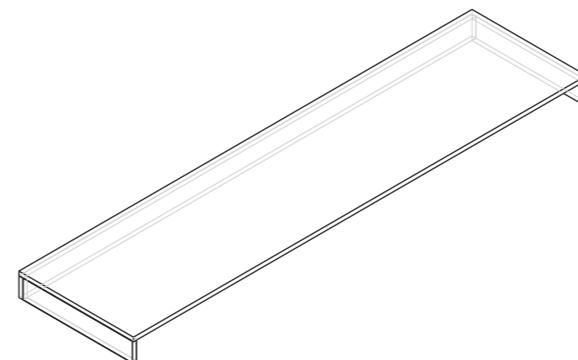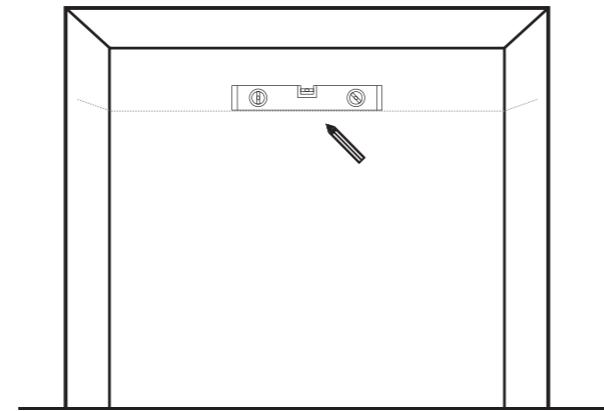


Top view - hat shelf fixings

### STEP 3

#### Fixing batten

Using a Stud finder, locate studs for fixing.

Align the wall batten with the pencil line marked on the back wall. Fix the battens to the back and cleats to the side wall using screws.

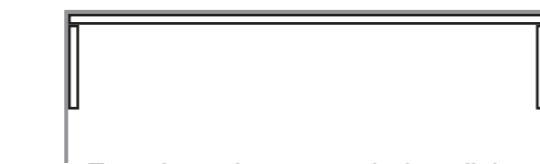



Top view - batten and cleat fixing

Note – if stud fixing points cannot be found you will have to use Wall Mate or Wall Plug fixings.

### STEP 6

#### Cut and fit hangrail/s

Measure the distance between side battens. Deduct 6mm from measurement to allow for the support flange. Cut rail/s to size. Fix the flanges 35mm under the hat shelf and 240 from the back; this will be your top fixing screw position. Place the hangrail into the flanges.

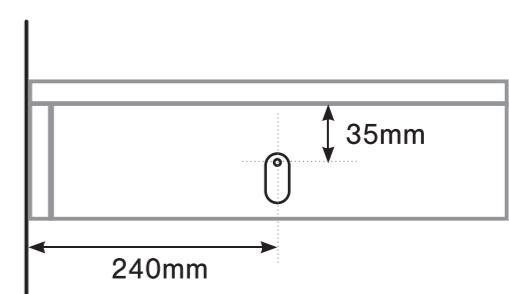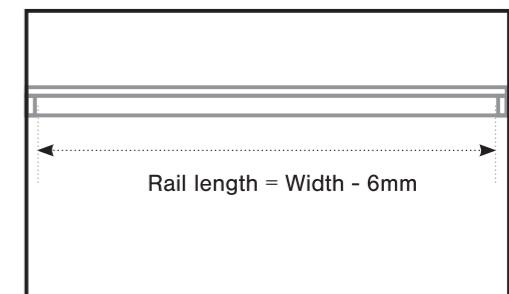

Side view

# LUGNA

FORM & FUNCTION

## CABINET CARE INSTRUCTIONS

---

### **Everyday care for your cabinets:**

*Liquid spills should be cleaned up as they occur. Liquids and other damp objects, i.e. towels, will eventually cause permanent damage should they be left unattended.*

*Everyday clean-up of cabinets can be done with a damp cloth and a dry cloth. Ensure you use a clean cloth every time when wiping down your cabinets, as foreign dirt, grease, and oils may inadvertently be transferred to the surface.*

### **Cleaning melamine products:**

*Oils, grease, and other soils that do not respond to water can be removed with a solution of mild soap and water. The surface should be rinsed immediately with a clean, damp cloth and dried thoroughly with a soft cloth to avoid streaking or moisture seeping into the seams around the edges.*

**PLEASE NOTE: Never use abrasive cleaners, ammonia, bleaching agents, scouring pads or powdered cleaners on any type of cabinetry.**

### **Cleaning cabinet hardware:**

*Brass and Silver cleaners are not recommended for cleaning handles. Some of these cleaning solutions contain harsh chemicals that may damage the finish on your handles.*

*Wash your hardware with a solution of warm water and a small amount of mild dish detergent. Dry your hardware and areas around the cleaned area immediately.*

*Hinges can be cleaned with a dry cloth or cotton-tipped swab.*